


## DW86HSE4N-BC38 (86HSE82)

测试条件: AC-60V      8 Subdivision

Frequency	800	2666	5333	8000	13333	18667	24000	26667	32000	40000	48000
speedr/min	30	100	200	300	500	700	900	1000	1200	1500	1800
encoder motor torque N.M	3.50	4.30	4.25	4.10	3.00	2.30	1.60	1.30	1.10	0.80	0.70
common motor torque N.M	3.10	3.90	3.40	3.10	1.80	1.25	0.80	0.60	0.50	0.25	0.15
torque increase	12.90%	10.26%	25.00%	32.26%	66.67%	84.00%	100.00%	116.67%	120.00%	220.00%	366.67%

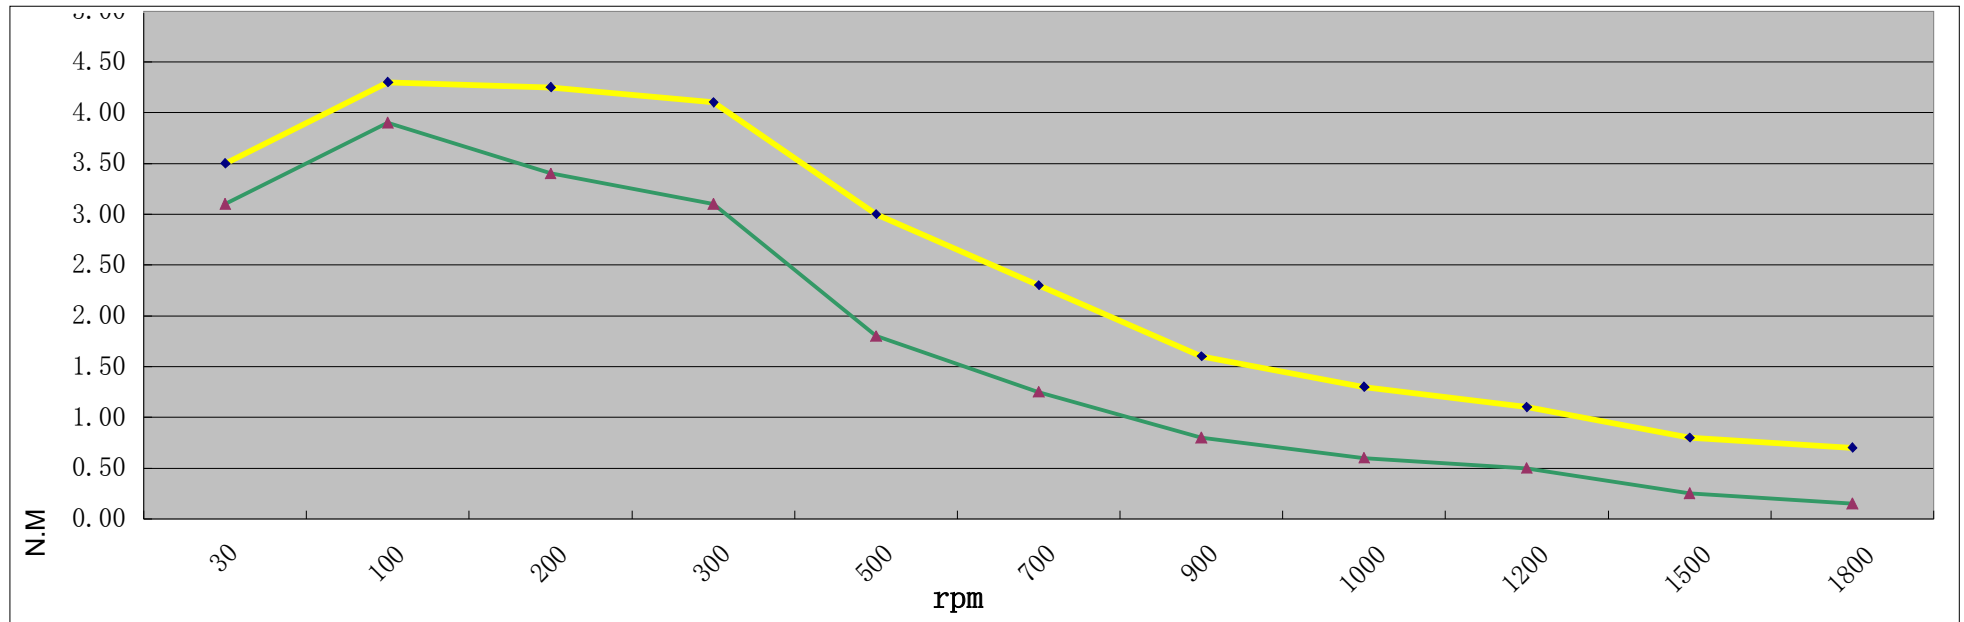

yellow :encoder motor

green:common motor

]